


## ● Driver without mounting plate

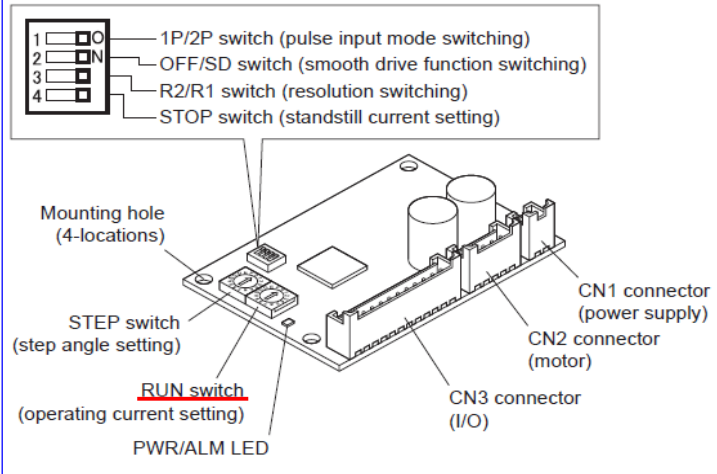

Current Setting

| RUN switch | Current Rate | Driver P/N             |                        |                        |                        |                    |                        |                        |                        |                    |
|------------|--------------|------------------------|------------------------|------------------------|------------------------|--------------------|------------------------|------------------------|------------------------|--------------------|
|            |              | CVD205-K<br>CVD205BR-K | CVD215-K<br>CVD215BR-K | CVD223-K<br>CVD223BR-K | CVD228-K<br>CVD228BR-K | ----<br>CVD245BR-K | CVD512-K<br>CVD512BR-K | CVD518-K<br>CVD518BR-K | CVD524-K<br>CVD524BR-K | ----<br>CVD528BR-K |
|            |              | 0.5                    | 1.5                    | 2.3                    | 2.8                    | 4.5                | 1.2                    | 1.8                    | 2.4                    | 2.8                |
| 0          | 25%          | 0.13                   | 0.38                   | 0.58                   | 0.70                   | 1.13               | 0.30                   | 0.45                   | 0.60                   | 0.70               |
| 1          | 30%          | 0.15                   | 0.45                   | 0.69                   | 0.84                   | 1.35               | 0.36                   | 0.54                   | 0.72                   | 0.84               |
| 2          | 35%          | 0.18                   | 0.53                   | 0.81                   | 0.98                   | 1.58               | 0.42                   | 0.63                   | 0.84                   | 0.98               |
| 3          | 40%          | 0.20                   | 0.60                   | 0.92                   | 1.12                   | 1.80               | 0.48                   | 0.72                   | 0.96                   | 1.12               |
| 4          | 45%          | 0.23                   | 0.68                   | 1.04                   | 1.26                   | 2.03               | 0.54                   | 0.81                   | 1.08                   | 1.26               |
| 5          | 50%          | 0.25                   | 0.75                   | 1.15                   | 1.40                   | 2.25               | 0.60                   | 0.90                   | 1.20                   | 1.40               |
| 6          | 55%          | 0.28                   | 0.83                   | 1.27                   | 1.54                   | 2.48               | 0.66                   | 0.99                   | 1.32                   | 1.54               |
| 7          | 60%          | 0.30                   | 0.90                   | 1.38                   | 1.68                   | 2.70               | 0.72                   | 1.08                   | 1.44                   | 1.68               |
| 8          | 65%          | 0.33                   | 0.98                   | 1.50                   | 1.82                   | 2.93               | 0.78                   | 1.17                   | 1.56                   | 1.82               |
| 9          | 70%          | 0.35                   | 1.05                   | 1.61                   | 1.96                   | 3.15               | 0.84                   | 1.26                   | 1.68                   | 1.96               |
| A          | 75%          | 0.38                   | 1.13                   | 1.73                   | 2.10                   | 3.38               | 0.90                   | 1.35                   | 1.80                   | 2.10               |
| B          | 80%          | 0.40                   | 1.20                   | 1.84                   | 2.24                   | 3.60               | 0.96                   | 1.44                   | 1.92                   | 2.24               |
| C          | 85%          | 0.43                   | 1.28                   | 1.96                   | 2.38                   | 3.83               | 1.02                   | 1.53                   | 2.04                   | 2.38               |
| D          | 90%          | 0.45                   | 1.35                   | 2.07                   | 2.52                   | 4.05               | 1.08                   | 1.62                   | 2.16                   | 2.52               |
| E          | 95%          | 0.48                   | 1.43                   | 2.19                   | 2.66                   | 4.28               | 1.14                   | 1.71                   | 2.28                   | 2.66               |
| F          | 100%         | 0.50                   | 1.50                   | 2.30                   | 2.80                   | 4.50               | 1.20                   | 1.80                   | 2.40                   | 2.80               |

Factory Setting = F

(A)

## PKP243D15A-L

|     | Current | Driver   | Switch |
|-----|---------|----------|--------|
| D02 | 0.28    | CVD205-K | 6      |
| D03 | 0.35    | CVD205-K | 9      |
| D04 | 0.42    | CVD205-K | C      |
| D05 | 0.57    | CVD223-K | 0      |
| D06 | 0.67    | CVD215-K | 4      |
| D07 | 0.71    | CVD228-K | 0      |
| D08 | 0.85    | CVD228-K | 1      |
| D14 | 1.4     | CVD228-K | 5      |
| D15 | 1.5     | CVD215-K | F      |
| D21 | 2.1     | CVD228-K | A      |
| D28 | 2.8     | CVD228-K | F      |

(A)

## PK513PA

|        | Current | Driver   | Switch |
|--------|---------|----------|--------|
| PK51*P | 0.35    | CVD512-K | 1      |
| PK52*P | 0.35    | CVD512-K | 1      |
| PK54*  | 0.75    | CVD512-K | 7      |
| PK56*  | 1.4     | CVD518-K | B      |
| PK59*  | 1.4     | CVD518-K | B      |

(A)

